

# S7700 Series Smart Routing Switches



# S7700 Series Smart Routing Switches

## Product Overview

The S7700 series switches (S7700 for short) are high-end smart routing switches designed for next-generation enterprise networks. The S7700 design is based on Huawei's intelligent multi-layer switching technology to provide intelligent service optimization methods, such as MPLS VPN, traffic analysis, comprehensive H-QoS policies, controllable multicast, load balancing, and security, in addition to high-performance Layer 2 to Layer 4 switching services. The S7700 also features scalability and reliability.

The S7700 can function either as an aggregation or core node on a campus network or in a data center to provide integrated wireless access. The S7700 also offers voice, video, and data services, helping enterprises build an integrated cost-effective end-to-end network.

An S7700 running the V2R5C00 or later system software can be upgraded to an agile switch by using an X1E card, which is equipped with the first Ethernet Network Processor (ENP) of Huawei. Customers can enjoy the benefits brought by the agile switch.

## Product Appearance

The S7700 series is available in three models: S7703, S7706, and S7712. The switching capacity and port density of all three models is expandable. The S7700 is based on a new hardware platform, which adopts a left-to-rear ventilation channel to achieve better energy efficiency. Key components work in redundancy mode to minimize risks of system breakdown and service interruption. Using innovative energy-saving chips, the S7700 provides an industry-leading solution for a sustainable energy-saving network.



## Product Features

### **Agile Switch, Enabling Networks to Be More Agile for Services**

- The S7700 series' native ACs allow enterprises to build a wireless network without additional AC hardware. S7700 switch can manage up to 1K APs and 16K users. It is the core switch that provides T-bit

AC capabilities, avoiding the performance bottleneck on independent AC devices. The native T-bit AC capabilities help organizations better cope with challenges in the high-speed wireless era.

- The S7700 series' unified user management function authenticates both wired and wireless users, ensuring a consistent user experience no matter whether they are connected to the network through wired or wireless access devices. The unified user management function supports various authentication methods, including 802.1x, MAC address, and Portal authentication, and is capable of managing users based on user groups, domains, and time ranges. These functions control user and service management and enable the transformation from device-centered management to user-centered management.
- Super Virtual Fabric (SVF) technology can not only virtualize fixed-configuration switches into S7700 switch line cards but also virtualize APs as switch ports. With this virtualization technology, a physical network with core/aggregation switches, access switches, and APs can be virtualized into a "super switch", offering the simplest network management solution.
- Packet Conservation Algorithm for Internet (iPCA) changes the traditional method that uses simulated traffic for fault location. iPCA technology monitors network quality for any service flow at any network node, at any time, and without extra costs. It can detect temporary service interruptions within one second and can identify faulty ports accurately. This cutting-edge fault detection technology turns "extensive management" into "fine granular management."
- The Service Chain feature virtualizes the value-added service processing capabilities, such as firewall, so that campus networks can utilize these capabilities in an undifferentiated manner. That is, these capabilities can be used without location constraint.

### Powerful service processing capabilities

- Huawei's advanced switching architecture permits rapid bandwidth expansion. The highly expandable backplane enables ports to be upgraded to a rate of 40 Gbit/s, and is compatible with the currently used cards, helping enterprises maximize their ROI.
- The S7700 provides high-density 10GE ports. Each S7712 chassis can provide a maximum of 480 x 10GE ports, meeting the requirements of bandwidth-consuming applications, such as multimedia conferencing and data access.
- The S7700's multi-service routing and switching platform meets requirements for service bearing at the access layer, aggregation layer, and core layer of enterprise networks. The S7700 provides wireless access along with voice, video, and data services, helping enterprises build integrated full-service networks with high availability and low latency.
- The S7700 supports distributed Layer 2/Layer 3 MPLS VPN functions, including MPLS, VPLS, HVPLS, and VLL, implementing VPN access for enterprise users.
- The S7700 supports various Layer 2 and Layer 3 multicast protocols such as PIM SM, PIM DM, PIM SSM, MLD, and IGMP snooping. It can provide enterprises with multi-terminal high definition video surveillance and video conferencing services.

### Carrier-class reliability and visual fault diagnosis

- Huawei's high reliability design ensures that the S7700 is 99.999% reliable. The S7700's rack structure uses a passive backplane design. The S7700 provides redundant backup for key components, including MPUs, power supply units, and fans, all of which are hot swappable.

- The S7700 innovatively implements the CSS function through switch fabrics, and packets are only switched once when they are forwarded between chassis. This addresses the problem of low switching efficiency caused by multiple switching processes during inter-chassis forwarding in clusters established using line cards. In addition, inter-chassis link aggregation can be used to improve link use efficiency and prevent single-point failures.
- The S7700 can use service ports as cluster ports, so that cluster members can be connected through optical fibers. This substantially expands the clustering distance.
- The S7700 has a dedicated fault detection subcard that provides hardware-based OAM function conforming to IEEE 802.3ah, 802.1ag, and ITU-Y.1731. The S7700 can also work with an NMS. The NMS provides a graphical fault diagnosis interface and traverses all network elements and links automatically to help users detect and locate faults quickly.
- The S7700 implements seamless switchover between the master and slave MPUs and supports graceful restart to ensure nonstop forwarding.

### Enhanced QoS mechanism, improving the voice and video experience

- The S7700's H-QoS control mechanisms classify traffic based on information from the link layer to the application layer. With advanced queue scheduling and congestion control algorithms, the S7700 performs accurate multi-level scheduling for data flows, satisfying enterprises' QoS requirements for a variety of services and user terminals.
- The S7700 supports hardware-based low delay queues for multicast packets so that the video service can be processed with high priority and low delay. This feature guarantees the high quality of key services in an enterprise, such as video conference and surveillance.
- The S7700 uses innovative priority scheduling algorithms to optimize the QoS queue scheduling mechanism for voice and video services. The improved scheduling mechanism shortens the delay of the VoIP service and eliminates the pixelation effect in the video service, improving user experience.

### High-performance IPv6 service processing, resulting in a smooth transition from IPv4 to IPv6

- Both the hardware platform and software platform of the S7700 support IPv6. The S7700 has earned the IPv6 Ready Phase 2 (Gold) designation.
- The S7700 supports IPv4/IPv6 dual stack, various tunneling technologies, IPv6 static routing, RIPng, OSPFv3, BGP+, IS-ISv6, and IPv6 multicast. These features meet the demand for IPv6 networking and combined IPv4 and IPv6 networking.

### Superb traffic analysis capability, resulting in real-time network performance monitoring

- The S7700 supports NetStream for the real-time collection and analysis of network traffic statistics.
- The S7700 supports the V5, V8, and V9 Netstream formats and provides aggregation traffic templates to reduce the burden on the network collector system. In addition, the S7700 supports real-time traffic collection, dynamic report generation, traffic attribute analysis, and traffic exception trap.
- NetStream monitors network traffic in real time and analyzes the device's throughput, providing data for network structure optimization and capacity expansion.

## Comprehensive security mechanisms, protecting enterprises from internal and external security threats

- NGFW is a next-generation firewall card that can be installed on an S7700. In addition to the traditional defense functions such as firewall, identity authentication, and Anti-DDoS, the NGFW supports IPS, anti-spam, web security, and application control functions.
- The S7700 provides comprehensive NAC solutions for enterprise networks. It supports MAC address authentication, Portal authentication, 802.1x authentication, and DHCP snooping-triggered authentication. These authentication methods ensure the security of various access modes, such as dumb terminal access, mobile access, and centralized IP address allocation.
- Additionally, the S7700 defends against DoS attacks, prevents unauthorized access, and prevents control plane overloading.

## Innovative energy-saving chips, allowing for intelligent power consumption control

- The S7700 uses innovative energy-saving chips, which can dynamically adjust power on all ports based on traffic volume. An idle port enters a sleep mode to reduce power consumption.
- The S7700 supports Power over Ethernet (PoE) and uses different energy management modes according to the powered device (PD) type, ensuring flexible energy management.
- The S7700 supports IEEE 802.3az Energy Efficient Ethernet and provides the low power idle mode for the PHY line card. If the link utilization is low, the S7700 switches to a lower speed or power PHY to reduce power consumption.

## Product Specifications

Item	S7703	S7706	S7712
Switching capacity	1.92 Tbps	3.84 Tbps/5.12 Tbps	3.84Tbps/5.12 Tbps
Forwarding performance	576 Mpps/1440 Mpps	1152 Mpps/2880 Mpps	1344 Mpps/3360 Mpps
Service Slot	3	6	12
Wireless network management	Native AC		
	AP access control, AP region management, and AP profile management		
	Radio profile management, uniform static configuration, and centralized dynamic management		
	Basic WLAN services, QoS, security, and user management		
	Deployment of ACs on different network layers		
User management	Unified user management		
	802.1x, MAC address, and Portal authentication		
	Traffic- and time-based accounting		
	User authorization based on user groups, domains, and time ranges		

Item	S7703	S7706	S7712
VLAN	Three types of interfaces: access, trunk, and hybrid		
	Default VLAN		
	VLAN switching		
	QinQ and selective QinQ		
	MAC address-based VLAN assignment		
MAC address	MAC address learning and aging		
	Static, dynamic, and blackhole MAC address entries		
	Packet filtering based on source MAC addresses		
	Limit on the number of MAC addresses learned on ports and VLANs		
Ring Protection	STP(IEEE 802.1d), RSTP(IEEE 802.1w), and MSTP(IEEE 802.1s)		
	SEP		
	BPDU protection, root protection, and loop protection		
	BPDU tunnel		
	ERPS (G.8032)		
IP routing	IPv4 routing protocols, such as RIPv1/v2, OSPF, BGP, and IS-IS		
	IPv6 dynamic routing protocols, such as RIPv6, OSPFv3, ISISv6, and BGP4+		
Multicast	IGMPv1/v2/v3 and IGMP v1/v2/v3 snooping		
	PIM-DM, PIM-SM, and PIM-SSM		
	MSDP and MBGP		
	Fast leave		
	Multicast traffic control		
	Multicast querier		
	Multicast packet suppression		
	Multicast CAC		
	Multicast ACL		
MPLS	Basic MPLS functions		
	MPLS OAM		
	MPLS-TE		
	MPLS VPN/VLL/VPLS		

Item	S7703	S7706	S7712
Reliability	LACP and E-Trunk between devices		
	VRRP and BFD for VRRP		
	BFD for BGP/IS-IS/OSPF/static route		
	NSF and GR for BGP/IS-IS/OSPF/LDP		
	TE FRR and IP FRR		
	Ethernet OAM (IEEE 802.3ah and 802.1ag)		
	ITU-Y.1731		
	DLDP		
QoS	Traffic classification based on Layer 2 protocol packet header, Layer 3 protocol information, Layer 4 protocol information, and 802.1p priority		
	ACL, CAR, re-mark, and scheduling		
	Queue scheduling algorithms including SP, WRR, DRR, SP+WRR, and SP+DRR		
	Congestion avoidance mechanisms, such as WRED and tail drop		
	H-QoS		
	Traffic shaping		
Configuration and maintenance	Easy Operation		
	Console and SSH terminals		
	Network management protocols, such as SNMP v1/v2c/v3		
	File uploading and downloading using FTP and TFTP		
	BootROM upgrade and remote upgrade		
	Hot patches		
	User operation logs		
Security and management	802.1x authentication and portal authentication		
	NAC		
	RADIUS and HWTACACS authentication		
	Different user levels for commands, preventing unauthorized users from using certain commands		
	Defense against DoS attacks, TCP SYN Flood attacks, UDP Flood attacks, broadcast storms, and heavy traffic attacks		
	Ping and traceroute		
	RMON		
	Service Chain		

Item	S7703	S7706	S7712
Value-added service*	Firewall		
	NAT		
	NetStream		
	IPSec		
	Load balancing		
	IPS		
Interoperability	Supports VBST (Compatible with PVST/PVST+/RPVST)		
	Supports LNP (Similar to DTP)		
	Supports VCMP (Similar to VTP)		
Energy conservation	IEEE 802.3az: Energy Efficient Ethernet (EEE)		
Dimensions (W x D x H)	442 mm x 476 mm x 175 mm	442 mm x 476 mm x 442 mm	442 mm x 476 mm x 664 mm
Chassis weight (empty)	< 15 kg	<30 kg	< 45 kg
Working voltage	DC: -38.4 V to -72 V AC: 90 V to 290 V		
Maximum power consumption of the entire equipment	≤800 W	≤1600 W	≤3000 W
Maximum PoE power	2200 W	8800 W	8800 W

\*: The S7700 can be equipped with the NGFW and IPS cards. For more specification information, see the brochures of the cards.

## Product List

Basic Configuration	
LE0BN66EDC	N66E DC Assembly Rack(Four 40A outputs, maximum 1600W per output, 600X600X2200mm)
LE0BN66EAC	N66E AC Assembly Rack(Eight 10A Outputs, maximum 1600W per output, 600X600X2200mm)
LE2BN66EA000	N66E AC Assembly Rack(Four 16A Outputs, maximum 2500W per output, 600X600X2200mm)
ES0B00770300	S7703 Assembly Chassis
ES0B00770600	S7706 Assembly Chassis



ES0B00771200	S7712 Assembly Chassis
ES1BS7703S01	S7703 Assembly Chassis-sustain FCC
ES1BS7706S01	S7706 Assembly Chassis-sustain FCC
ES1BS7712S01	S7712 Assembly Chassis-sustain FCC
ES0B017706P0	S7706 POE Assembly Chassis
ES0B017712P0	S7712 POE Assembly Chassis
ES1BS7706SP1	S7706 POE Assembly Chassis-sustain FCC
ES1BS7712SP1	S7712 POE Assembly Chassis-sustain FCC
LE0M00FBXB00	Wide Voltage 68 Fan Box
ES1M00FBX001	Enhancement Wide Voltage 68 Fan Box
<b>Monitoring Board</b>	
LE0DCMUA0000	Centralized Monitoring Board
<b>Main Control Unit</b>	
ES0D00MCUA00	S7703 Main Control Unit A
ES0D00SRUA00	S7706/S7712 Main Control Unit A
ES0D00SRUB00	S7706/S7712 Main Control Unit B, Clock
ES1D2SRUH000	S7706/S7712 Main Control Unit H
<b>SRU Service Card</b>	
ES0D00FSUA00	Enhanced Flexible Service Unit
ES02VSTSA	Cluster Switching System Service Unit
<b>10/100BASE-T Interface Card</b>	
ES0D0F48TA00	48-Port 10/100BASE-T Interface Card (EA, RJ45)
ES0DF48TFA00	48-Port 10/100BASE-T Interface Card (FA, RJ45)
ES0D0F48TC00	48-Port 10/100BASE-T Interface Card (EC, RJ45)
<b>10/100/1000BASE-T Interface Card</b>	
ES0DG24TFA00	24-Port 10/100/1000BASE-T Interface Card (FA, RJ45)
ES0D0G48TA00	48-Port 10/100/1000BASE-T Interface Card (EA, RJ45)
ES0DG48TFA00	48-Port 10/100/1000BASE-T Interface Card (FA, RJ45)
ES0D0G48TC00	48-Port 10/100/1000BASE-T Interface Card (EC, RJ45)
ES1D2G48TED0	48-Port 10/100/1000BASE-T Interface Card(ED,RJ45)

ES1D2G48TBC0	48-Port 10/100/1000BASE-T Interface Card(BC,RJ45)
ES0D0T24XA00	24-Port 10/100/1000BASE-T and 2-Port 10GBASE-X Interface Card (EA,RJ45/XFP)
ES1D2G48TX1E	48-Port 10/100/1000BASE-T Interface Card (X1E, RJ45)
100/1000BASE-X Interface Card	
ES0D0G24SA00	24-Port 100/1000BASE-X Interface Card (SA, SFP)
ES0D0G24SC00	24-Port 100/1000BASE-X Interface Card (EC, SFP)
ES0D0G24CA00	24-Port 100/1000BASE-X and 8-Port 10/100/1000BASE-T Combo Interface Card (SA, SFP/RJ45)
ES0D0S24XA00	24-Port 100/1000BASE-X and 2-Port 10GBASE-X Interface Card (EA, SFP/XFP)
ES1D2G24SED0	24-Port 100/1000BASE-X Interface Card(ED,SFP)
ES0D0G48SA00	48-Port 100/1000BASE-X Interface Card (EA, SFP)
ES0D0G48SC00	48-Port 100/1000BASE-X Interface Card (EC, SFP)
ES1D2G48SFA0	48-Port 100/1000BASE-X Interface Card (FA, SFP)
ES1D2G48SED0	48-Port 100/1000BASE-X Interface Card (ED, SFP)
ES1D2G48SBC0	48-Port 100/1000BASE-X Interface Card(BC,SFP)*
ES1D2G48SX1E	48-Port 100/1000BASE-X Interface Card (X1E,SFP)
100/1000BASE-X Interface Card	
ES0DG48CEAT0	36-Port 10/100/1000BASE-T and 12-Port 100/1000BASE-X Interface Card (EA, RJ45/SFP)
ES1D2S24XEC0	24-Port 100/1000BASE-X and 2-Port 10GBASE-X Interface Card(EC,SFP/XFP)
10GBASE-X Interface Card	
ES0D0X2UXA00	2-Port 10GBASE-X Interface Card (EA, XFP)
ES0D0X2UXC00	2-Port 10GBASE-X Interface Card (EC, XFP)
ES1D2X02XEC1	2-Port 10GBASE-X Interface Card(EC,XFP),FCC
ES0D0X4UXA00	4-Port 10GBASE-X Interface Card (EA, XFP)
ES0D0X4UXC00	4-Port 10GBASE-X Interface Card (EC, XFP)
ES1D2X04XEC1	4-Port 10GBASE-X Interface Card(EC,XFP),FCC
ES1D2X04XED0	4-Port 10GBASE-X Interface Card (ED, XFP)

ES1D2S04SX1E	4-Port 10GBASE-X and 24-Port 100/1000BASE-X and 8-Port 10/100/1000BASE-T Combo Interface Card (X1E,RJ45/SFP/SFP+)
ES1D2X08SED4	8-Port 10GBASE-X Interface Card(ED,SFP+)
ES1D2X08SED5	8-Port 10GBASE-X Interface Card(ED,SFP+),FCC
ES1D2S08SX1E	8-Port 10GBASE-X and 8-Port 100/1000BASE-X and 8-Port 10/100/1000BASE-T Combo Interface Card (X1E,RJ45/SFP/SFP+)
ES0D0X12SA00	12-Port 10GBASE-X Interface Card (SA, SFP+)
ES1D2X16SFC0	16-Port 10GBASE-X Interface Card (FC, SFP+)
ES1D2X40SFC0	40-Port 10GBASE-X Interface Card (FC, SFP+)
40GE BASE-X interface card	
ES1D2L02QFC0	2-Port 40GBASE-X Interface Card (FC,QSFP+)
100GE BASE-X interface card	
POE Interface Card	
ES0D0G48VA00	48-Port 10/100/1000BASE-T POE Interface Card (EA, RJ45, POE)
ES1D2G48VEA2	48-Port 10/100/1000BASE-T POE Interface Card(EA,RJ45,POE,EEE)
Service Processing Unit	
ET1D2FW00S00	NGFW Module A,with HW General Security Platform Software
ET1D2FW00S01	NGFW Module B,with HW General Security Platform Software
ET1D2IPS0S00	IPS Module A,with HW General Security Platform Software
ACU2	WLAN ACU2 Access Controller Unit(128 AP Control Resource Included)
Optical transceiver	
FE-SFP optical transceiver	
SFP-FE-SX-MM1310	Optical Transceiver,SFP,100M/155M,Multi-mode Module(1310nm,2km,LC)
eSFP-FE-LX-SM1310	Optical Transceiver,eSFP,100M/155M,Single-mode Module(1310nm,15km,LC)
S-SFP-FE-LH40-SM1310	Optical Transceiver-eSFP-FE-Single-mode Module (1310nm,40km,LC)
S-SFP-FE-LH80-SM1550	Optical Transceiver-eSFP-FE-Single-mode Module (1550nm,80km,LC)
GE-SFP module	
SFP-1000BaseT	Electrical transceiver-SFP-GE-Electrical Interface Module (100m,RJ45)
eSFP-GE-SX-MM850	Optical Transceiver-eSFP-GE-Multi-mode Module (850nm,0.5km,LC)

SFP-GE-LX-SM1310	Optical Transceiver-SFP-GE-Single-mode Module (1310nm,10km,LC)
S-SFP-GE-LH40-SM1310	Optical Transceiver-eSFP-GE-Single-mode Module (1310nm,40km,LC)
S-SFP-GE-LH40-SM1550	Optical Transceiver-eSFP-GE-Single-mode Module (1550nm,40km,LC)
S-SFP-GE-LH80-SM1550	Optical Transceiver-eSFP-GE-Single-mode Module (1550nm,80km,LC)
eSFP-GE-ZX100-SM1550	Optical Transceiver-eSFP-GE-Single-mode Module (1550nm,100km,LC)
10GE-XFP optical transceiver	
XFP-SX-MM850	Optical Transceiver-XFP-10G-Multi-mode Module (850nm,0.3km,LC)
XFP-STM64-LX-SM1310	Optical Transceiver-XFP-10G-Single-mode Module (1310nm,10km,LC)
XFP-STM64-LH40-SM1550	Optical Transceiver-XFP-10G-Single-mode Module (1550nm,40km,LC)
XFP-STM64-SM1550-80km	Optical Transceiver-XFP-10G-Single-mode Module (1550nm,80km,LC)
10GE-SFP+ optical transceiver	
OMXD30000	Optical Transceiver-SFP+-10G-Multi-mode Module (850nm,0.3km,LC)
OSX010000	Optical Transceiver-SFP+-10G-Single-mode Module (1310nm,10km,LC)
OSX040N01	Optical Transceiver-SFP+-10G-Single-mode Module (1550nm,40km,LC)
LE2MXSC80FF0	Optical Transceiver,SFP+,10G,Single-mode Module (1550nm,80km,LC)
OSXD22N00	Optical Transceiver,SFP+,10G,Multi-mode Module (1310nm, 0.22km, LC, LRM)
SFP-10G-USR	Optical Transceiver,SFP+,10G,Multi-mode Module (850nm,0.1km,LC)
SFP-10G-ZR	Optical Transceiver,SFP+,10G,Single-mode Module (1550nm,80km,LC)
SFP-10G-AOC3M	AOC Optical Transceiver,SFP+,850nm,1G~10G,0.003km
SFP-10G-AOC10M	AOC Optical Transceiver,SFP+,850nm,1G~10G,0.01km
SFP-10G-BXU1	10GBase,BIDI Optical Transceiver,SFP,10G,Single-mode Module(TX1270nm/RX1330nm,10km,LC)
SFP-10G-BXD1	10GBase,BIDI Optical Transceiver,SFP,10G,Single-mode Module(TX1330nm/RX1270nm,10km,LC)
SFP-10G-ZCW1511	Optical Transceiver,SFP+,10G,Single-mode Module (CWDM,1511nm,70km,LC)
SFP-10G-ZCW1471	Optical Transceiver,SFP+,10G,Single-mode Module (CWDM,1471nm,70km,LC)
SFP-10G-ZCW1491	Optical Transceiver,SFP+,10G,Single-mode Module (CWDM,1491nm,70km,LC)


SFP-10G-ZCW1531	Optical Transceiver,SFP+,10G,Single-mode Module (CWDM,1531nm,70km,LC)
SFP-10G-ZCW1551	Optical Transceiver,SFP+,10G,Single-mode Module (CWDM,1551nm,70km,LC)
SFP-10G-ZCW1571	Optical Transceiver,SFP+,10G,Single-mode Module (CWDM,1571nm,70km,LC)
SFP-10G-ZCW1591	Optical Transceiver,SFP+,10G,Single-mode Module (CWDM,1591nm,70km,LC)
SFP-10G-ZCW1611	Optical Transceiver,SFP+,10G,Single-mode Module (CWDM,1611nm,70km,LC)
SFP-10G-GE-SX	Optical Transceiver, SFP, 10G/GE, Multi-mode Module(850nm,0.4km/0.55km,LC)
SFP-10G-GE-LX	Optical Transceiver, SFP, 10G/GE, Single-mode Module(1310nm,10km,LC)
SFP-10G-GE-EX	Optical Transceiver,SFP,10G/GE,Single-mode Module(1550nm,40km,LC)
40GE-QSFP+ optical transceiver	
QSFP-40G-SR4	40GBase-SR4 Optical Transceiver,QSFP+,40G,Muti-mode (850nm, 0.15km ,MPO)
QSFP-40G-iSR4	40GBase-SR4 Optical Transceiver,QSFP+,40G,Muti-mode (850nm, 0.15km ,MPO)(Connect to four SFP+ Optical Transceiver)
QSFP-40G-LR4	40GBase-LR4 Optical Transceiver,QSFP+,40GE,Single-mode Module(1310nm,10km,LC)
QSFP-40G-eiSR4	40GBase-eSR4 Optical Transceiver,QSFP+,40G,Multi-mode (850nm,0.3km,MPO)(Connect to four SFP+ Optical Transceiver)
BIDI-SFP optical transceiver	
SFP-FE-LX-SM1310-BIDI	Optical Transceiver-eSFP-FE-BIDI Single-mode Module (TX1310/ RX1550,15km,LC)
SFP-FE-LX-SM1550-BIDI	Optical Transceiver-eSFP-FE-BIDI Single-mode Module (TX1550/ RX1310,15km,LC)
SFP-GE-LX-SM1310-BIDI	Optical Transceiver-eSFP-GE-BIDI Single-mode Module (TX1310/ RX1490,10km,LC)
SFP-GE-LX-SM1490-BIDI	Optical Transceiver-eSFP-GE-BIDI Single-mode Module (TX1490/ RX1310,10km,LC)
SFP-GE-BXU1-SC	1000Base,BIDI Optical Transceiver,SFP,GE,Single-mode Module(TX1490nm/RX1310nm,10km,SC)
LE2MGSC40ED0	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(TX1490/ RX1310,40km,LC)
LE2MGSC40DE0	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(TX1310/ RX1490,40km,LC)

Power module	
LE0MPSD16	1600W DC Power Module(gray)
LE0MPSA08	800W AC Power Module(gray)
PAC-2200WF	2200W AC Power Module
LE0W01DPDB	DC Power Distribution Unit (Four 40A outputs, maximum 1600W per output, include power cable)
IN6W18L10A	AC Power Distribution Unit (Eight 10A Outputs, maximum 1600W per output, include power cable)
IM1W24APD	AC Power Distribution Unit (Four 16A Outputs, maximum 2500W per output, include power cable)
Software	
ES1SBSM23000	Quidway S7700 Basic SW, V200R003
ES1SBSM25000	Quidway S7700 Basic SW, V200R005
ES0SMS267700	Quidway S7700 Basic SW, V200R006
ES0SMS277700	Quidway S7700 Basic SW, V200R007
ES0SSVFF7700	SVF Function License(with S7700 used)
ES0SMPLS7700	MPLS Function License
ES0SNQAF7700	NQA Function License
ES0SIPV67700	IPV6 Function License
ES1SFIB128K0	X-series LPU FIB Resource License-128K
ES1SWL512AP0	WLAN Access Controller AP Resource License-512AP (with the X-series LPU used)
ES1SWL128AP0	WLAN Access Controller AP Resource License-128AP (with the X-series LPU used)
ES1SWL64AP00	WLAN Access Controller AP Resource License-64AP (with the X-series LPU used)
ES1SWL16AP00	WLAN Access Controller AP Resource License-16AP (with the X-series LPU used)
L-ACU2-128AP	ACU2 Wireless Access Controller AP Resource License(128 AP)
L-ACU2-256AP	ACU2 Wireless Access Controller AP Resource License(256 AP)
L-ACU2-384AP	ACU2 Wireless Access Controller AP Resource License(384 AP)
L-ACU2-512AP	ACU2 Wireless Access Controller AP Resource License(512 AP)
Documentation	
ES0I000DOC00	S7700 Smart Routing Switch Documentation

## Applications


### Large-Scale Campus Networks

The S7700 can be used as an aggregation switch on a large-scale campus network, helping to build a highly reliable, scalable, and manageable enterprise network. With hardware-based CPU queue scheduling and firewall modules, the S7700 enhances security at the aggregation layer and protects the enterprise's core network from DDoS attacks and other security threats.

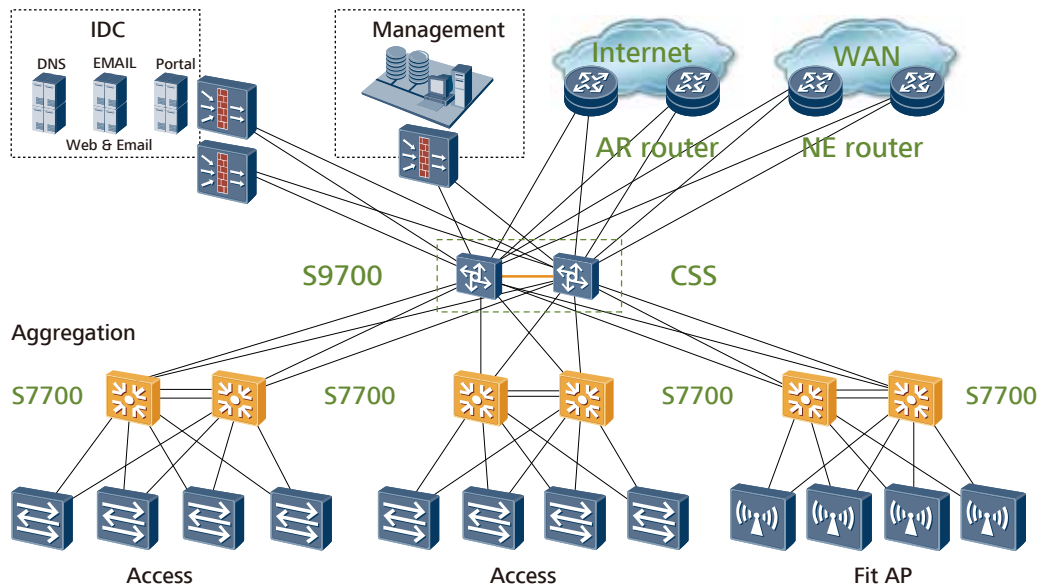

### Small - and Medium-sized Campus Networks

The S7700 can work at the core layer of small- and medium-sized campus networks. It provides a cost-effective, reliable, and easy-to-deploy network solution for small- and medium-sized enterprises.

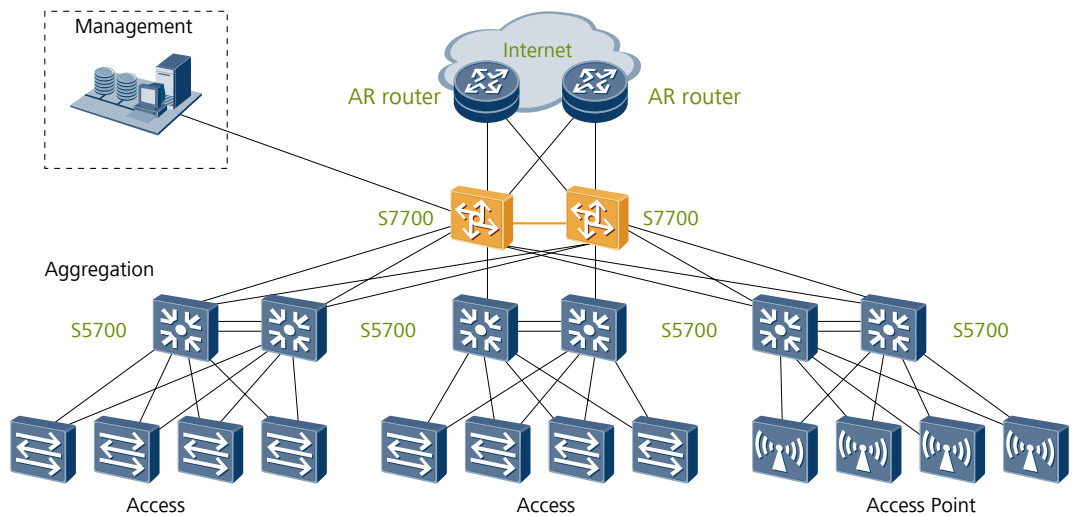



For more information, visit <http://enterprise.huawei.com> or contact the Huawei local sales office.

**Copyright © Huawei Technologies Co., Ltd. 2014. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

**Trademark Notice**

 , HUAWEI, and  are trademarks or registered trademarks of Huawei Technologies Co., Ltd. Other trademarks, product, service and company names mentioned are the property of their respective owners.

**General Disclaimer**

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

HUAWEI TECHNOLOGIES CO.,LTD.  
Huawei Industrial Base  
Bantian Longgang  
Shenzhen 518129,P.R.China  
Tel: +86 755 28780808

[www.huawei.com](http://www.huawei.com)